


Product Datasheet

DT-UV-214A

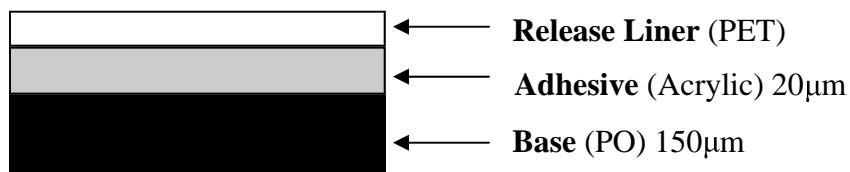

Characteristics

- ◆ UV-curable tape for dicing
- ◆ High tack adheres completely to all backside surface materials
- ◆ Hard glue prevents residue and chipping
- ◆ Ideal for packages and thick die
- ◆ Use on many substrates

Specifications

<i>Property</i>	<i>Spec</i>	
Total Thickness (µm)	170	
Adhesive Strength (N/20mm)	<u>Pre-UV</u> 8.5	<u>Post-UV*</u> <0.5
Probe Tack (N/20mm²)	<u>Pre-UV</u> 5.6	<u>Post-UV*</u> <0.5

* Recommended UV Dosage: 150mJ/cm² (365nm)

Product Detail

Color	Milky White
Width	Any 1cm increment
Length	50m/100m
Min. Order	2 rolls

Warranty: 1 year from date of manufacture when stored as recommended (23 +/- 5°C, 50% RH +/- 5%)

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.