


# Product Datasheet

## *GT-UV-214A*

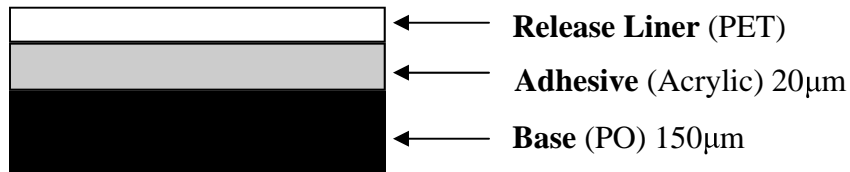

### *Characteristics*

- ◆ UV-curable tape for backgrinding
- ◆ High tack adheres completely to all surface materials
- ◆ Hard glue prevents residue
- ◆ Can be used for thinner wafers
- ◆ Glue thickness allows for use on wafers with some topography
- ◆ Use on many substrates

### *Specifications*

<i>Property</i>	<i>Spec</i>	
<b>Total Thickness (µm)</b>	170	
<b>Adhesive Strength (N/20mm)</b>	<u>Pre-UV</u> 8.5	<u>Post-UV*</u> <0.5
<b>Probe Tack (N/20mm<sup>2</sup>)</b>	<u>Pre-UV</u> 5.6	<u>Post-UV*</u> 0.05

\* Recommended UV Dosage: 150mJ/cm<sup>2</sup> (365nm)

### *Product Detail*

<b>Color</b>	Milky White
<b>Width</b>	Any 1cm increment
<b>Length</b>	50m/100m
<b>Min. Order</b>	2 rolls

**Warranty:** 1 year from date of manufacture when stored as recommended (23 +/- 5°C, 50% RH +/- 5%)

This document was created with Win2PDF available at <http://www.daneprairie.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.