
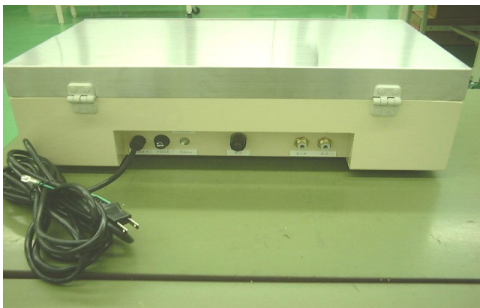


UV Irradiators

Model STM-UV-815S

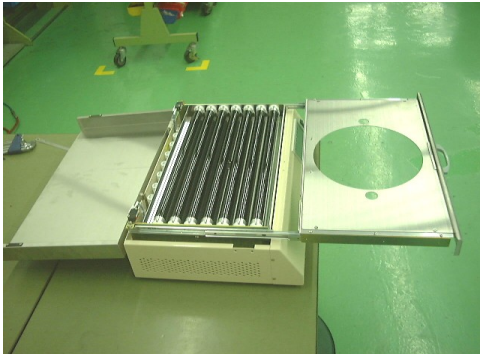

Standard Manual Grade

Model	Work Tray Size (inches/mm)	Dimensions	
STM-UV-815	6" or 8" / 180mm or 203mm	530mmx370mmx170mm	18.5
STM-UV-1215	12" / 304mm	530mmx453mmx170mm	20

S type programmable grade

Model	Work Tray Size (inches/mm)	Dimensions	
STM-UV-815S	6" or 8" / 180mm or 203mm	530mmx370mmx170mm	18.5
STM-UV-1215S	12" / 304mm	530mmx453mmx170mm	20

FEATURES

standard manual grade

- Analog 2 way count ring timer
- Manual shut off

S type programmable grade

- LCD touch panel interface
- Programmable timer controller
- UV measuring sensor
- Handles multiple frames

OPTIONS

- Option for full glass tray will allow for larger irradiating area 350mm x 420mm

BENEFITS

- Safeguard for high temperature
- Inexpensive UV fluorescent lamp
- Compact Size
- Measurement of UV Strength

LAMP Spec

- UV fluorescent 7 lamps
- 15 Watts per lamp
- 352Nm Peak wavelength

UTILITIES

- Power AC100V(50/60hz)
- 150 total watts
- Size W350x L600 x H230
- Weight 25Kg

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.